


Freezers and Refrigerators

NC/BC Series



Temperature

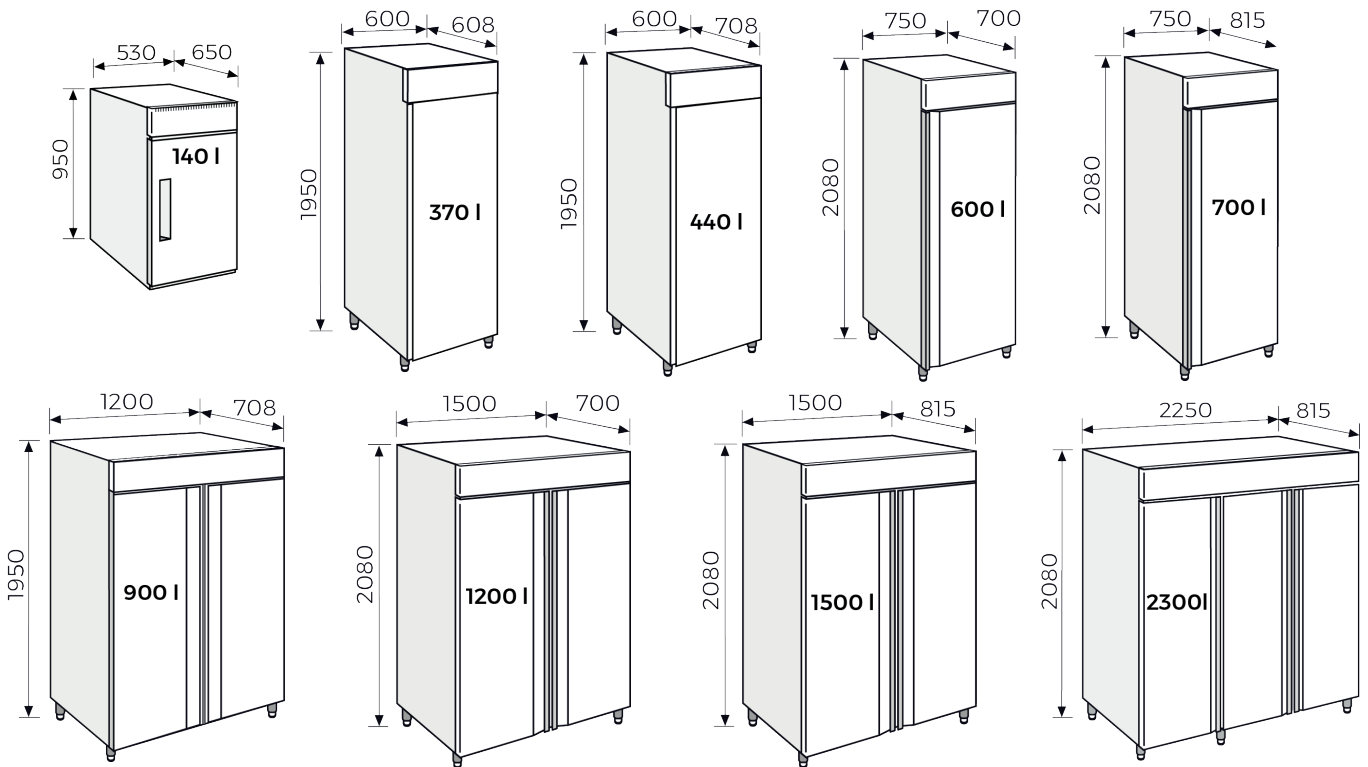

0°C to +15°C (N)
-15°C to -25°C (B)

Freezing system



Ventilated

Defrosting



Automatic

Alarms



Hight/low temp.

Key lock



Equipped

Controller



Easy to use

Climatic class



SN-ST

Noise level



55 dB

Electric power




220-240V ~ /50 Hz

Positive Range (N)	NC140	NC370	NC440	NC600	NC700	NC900	NC1200	NC1500	NC2300
Negative Range (B)	BC140	BC370	BC440	BC600	BC700	BC900	BC1200	BC1500	BC2300
Temperature data									
Temperature range [°C]	N				0°C...+15°C				
	B				-15°C...-25°C				
Structure and insulation									
Exterior material	white sheet steel or full stainless steel AISI 304								
Internal material	stainless steel AISI 304								
Insulation	50 mm insulation by environment-friendly polyurethane								
Shelf grill	plastic-coated wire shelves, max load 30Kg								
Alarm and security									
Type alarm	audio-visual								
Alarm parameter	high and low temperature								
Remote connection	yes								
Data Dimension									
Net Interior volume [l]	130	310	370	450	530	810	1020	1180	1830
Net weight unit (no load) [Kg]	70	80	95	110	160	165	205	245	360
Interior Dimension									
Width [mm]	450	500	500	600	600	1100	1320	1320	2070
Depth [mm]	535	480	580	570	670	580	570	670	670
Height [mm]	520	1250	1250	1350	1350	1250	1350	1350	1350
Exterior Dimension									
Width [mm]	530	600	600	750	750	1200	1500	1500	2250
Depth [mm]	650	608	708	700	815	708	700	815	815
Height [mm]	950	1950	1950	2080	2080	1950	2080	2080	2080
Interior Shelves									
Total shelves [n°]	2	3	3	3	3	6	6	6	9
Usable area, Width [mm]	400	460	460	530	530	460	530	530	530
Usable area, Depth [mm]	500	470	570	550	650	570	550	650	650
Main Door									
Number of Door	1	1	1	1	1	2	2	2	3
Electrical Data									
Rated Voltage [V]	230	230	230	230	230	230	230	230	230
Power Frequency [Hz]	50	50	50	50	50	50	50	50	50
Nominal Power [kW]	N	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
	B	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
Unit Fuse [A]	N	10	10	10	10	10	10	10	10
	B	14	14	14	14	14	14	14	14
Phase (Nominal voltage)	1~	1~	1~	1~	1~	1~	1~	1~	1~

All technical data are specified for units with standard equipment at an ambient temperature of +38 °C and a voltage fluctuation of ±10 %.

Main options




Additional shelf




Graphic weekly chart




Roll kit



Cable port with tap




Stainless steel drawer
(Only for 700/1200/1500/2300)



Front top for drawer



Internal socket



Wooden crate packing



Partition for drawer



Different voltage



FDM - ENVIRONMENT MAKERS
Technical specifications are subject to change